

MUSHROOM HEATER

SAFETY WARNINGS AND OPERATING INSTRUCTIONS

(Please read all instructions carefully)

Safety Warnings

(Use only with L.P. Gas)

- When operating, ensure the appliance is located on a level surface.
- Do not spray aerosols in the vicinity of this heater when it is operating.
- Do not use this heater where petroleum products or other flammable liquids or vapours are stored or used.
- Do not operate this heater unless at maximum height.
- If the heater fails to operate correctly, contact place of hire or their authorised agent for advice and service. **DO NOT ATTEMPT REPAIRS YOURSELF.**
- The following minimum clearances to combustible materials must be observed.
 - **Minimum clearance from heater to any walls - 600mm**
 - **Minimum clearance from heater to ceiling - 1.2 metres**
 - **Minimum clearance to shade cloth or similar material - 2.5 metres**

Operating Instructions

Lighting the burner:

1. Before lighting ensure appliance is on a firm level surface.
2. Lift the tank housing.
3. Make sure the regulator hose is connected to the LP Gas cylinder and the connection is tight. This is a left hand thread and turns counter clockwise to tighten.
4. Turn on the LP Gas cylinder valve in a counter clockwise direction. Check for leaks by applying soapy water to LP Gas connections.
5. Press and turn the control knob to **HI** position.
6. Hold down the control knob for 5 to 10 seconds.
7. While holding control knob, press direct ignition button several times until burner head flame ignites. Release control knob 10 seconds after ignition.
8. Turn the control knob to **LO** position for 5 minutes before changing to desired temperature level.
9. Lower tank housing
10. If the burner flame extinguishes accidentally, turn the control knob to **OFF** position.


Re-lighting the burner:

1. Repeat steps 5 to 9 in lighting instructions.

Shutting down the burner:

1. Turn control knob to the **OFF** position.
2. Turn LP Gas cylinder valve clockwise to the **OFF** position when heater is not in use.

Do not touch hot surfaces and allow heater to cool before cleaning (if required)

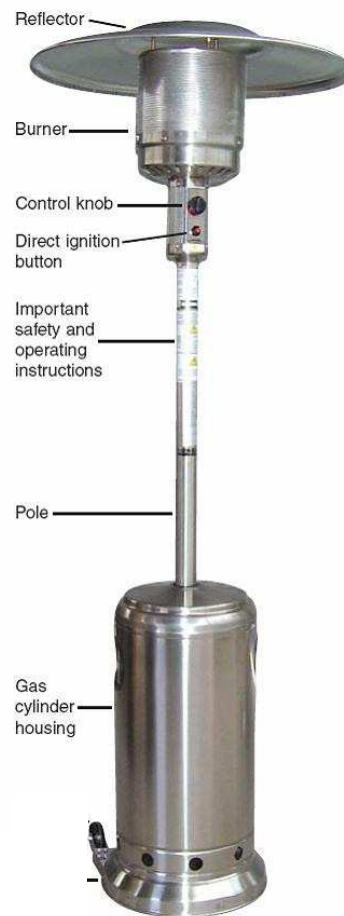

WARNING

AFTER TURNING HEATER OFF, YOU MUST WAIT 5 MINUTES OR MORE TO LET EXCESS GAS DISSIPATE BEFORE LIGHTING AGAIN. FAILURE TO DO SO MAY RESULT IN A GAS EXPLOSION AND CAUSE SERIOUS INJURY, PROPERTY DAMAGE OR EVEN DEATH

www.aabco.com.au

12 Citrus Street, Braeside, Vic. 3195
Tel: 9587 8799

